

P	N	CG _{1p} -3838I	RPC/D20A90
S	D		



<u>6</u>

♦

♦

• 0

•

• 0

♦

♦

\rightarrow -

♦


♦


♦

♦



P D

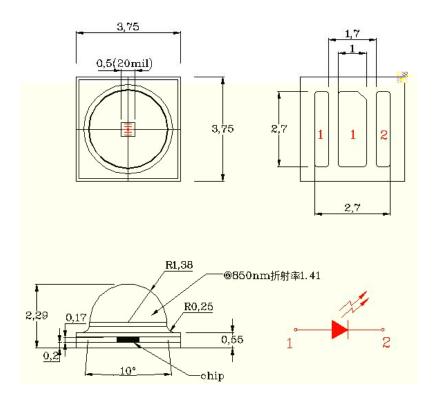

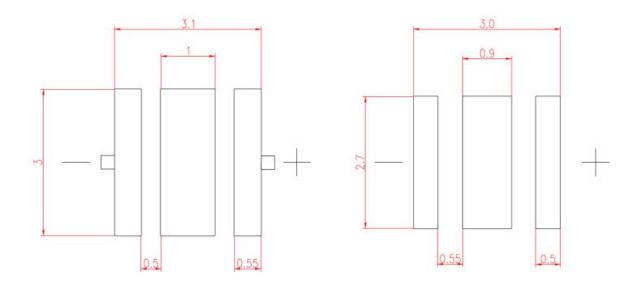

0.



A M R T = 25

()	0.		
(/ 0 ,0.)	00		
	00		
	- 0 +		
	- 0 + 00		
	0 0	0	


E O C T = 25


					0
	/		0		
	/ 0		0		
		0			0
-			0		0
					0
				0	
	(-)				0
		000			

Wafer manufacturer information: EPISTAR




Typical Electro-Optical Characteristics Curve



















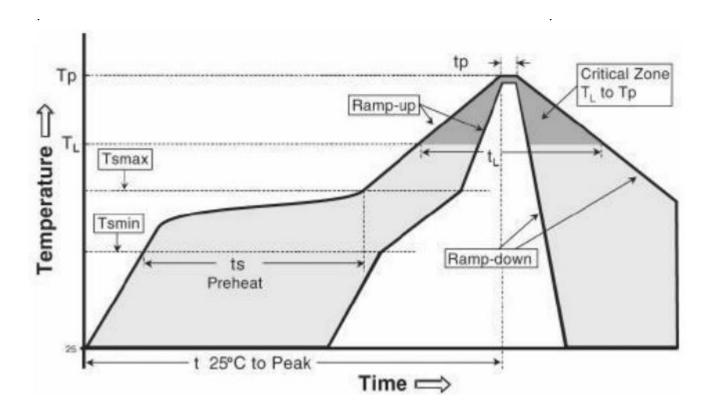


	0
()	00
() ()	0- 0 .
- ()	
()	
()	0- 0
()	0
()	0
().	
- ()	/



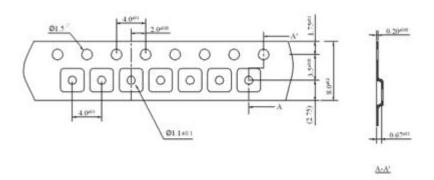

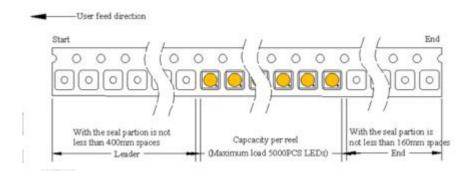



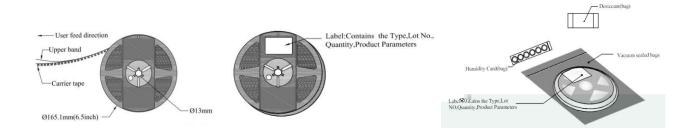



The reliability of products shall be satisfied with items listed below. Confidence level 90%

LTPD (group of permitted defect rate): 10%

(3 p p	,				
		/		/	
	. 0 ±	5secs	0	00 0	0
	+ 00 - 0	00	0	00 0	0
	+ 00 0 - 0	00	0		0
	. 00	000	0	00 0	0
	0	000	0	00 0	0
	0	000	0	/	
/	/ %	000	0	00 0	0

